

5G Omni Ceiling Antenna



An ISO 9001: 2015 Certified Company

Technical Specifications:

Model No -	COMNI5G040			
Frequency Range (MHz)	6 98-806	806-960	1710-2700	3300-3800
Gain	3/5 DBI			
VSWR	≤ 1.8	≤ 1.5	≤ 1.5	≤ 1.5
Horizontal Beamwidth	360°			
Polarization Type	Vertical			
PIM(IM3)	≤ -140 dBm @ 2 x 33 dBm			
Max Power	50 W			
Input Impedence	50 Ω			

Operating Temperature	-40 °C to +65 °C
Relative Humidity	5 to 95%
Lightning Protection	DC ground

Connector	N-Female
Radome Material	ABS
Radome Color	White
Mounting Type	Ceiling Installation
Cable	58
Cable Lengh	200 MM

Features

- Wide Frequency Range
- Excellent Electrical Performance
- Maintenance Free

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

GLEAM LIGHT INDIA PRIVATE LIMITED



12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

5G Omni Ceiling Antenna



An ISO 9001: 2015 Certified Company






Radiation




900 MHZ

1710 MHZ

2500 MHZ

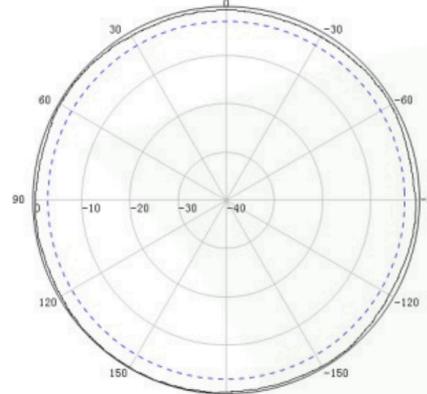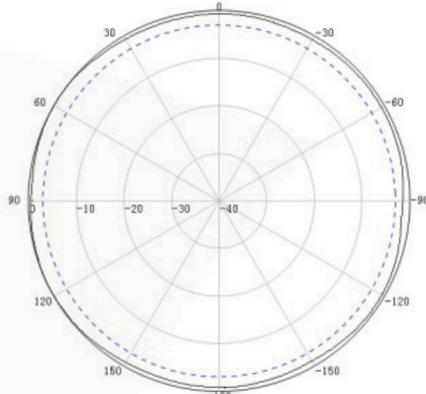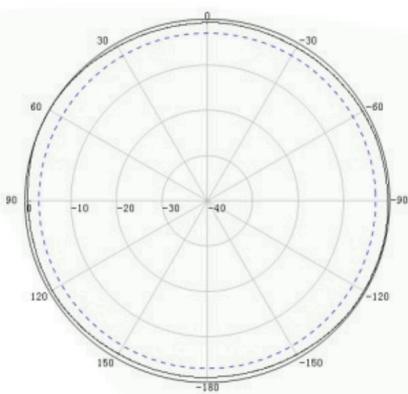

Horizontal

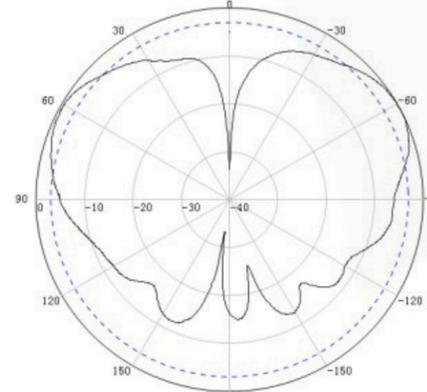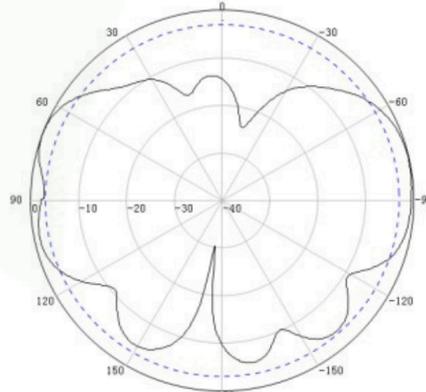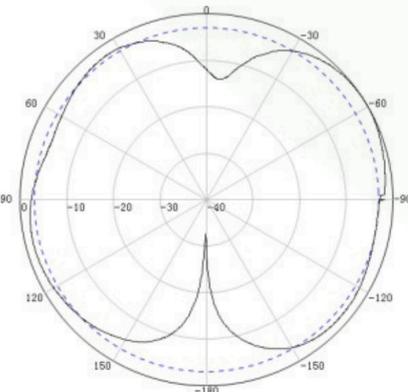

Vertical

CALL OR  +91-8800386366

Follow Us For More Updates [GLEAMLIGHTINDIA](#) /     

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

GLEAM LIGHT INDIA PRIVATE LIMITED



12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041