

5G LPDA Antenna



An ISO 9001: 2015 Certified Company

Technical Specifications:

Model No.	LPDAOD5G09			
Frequency Range (MHz)	698-806	806-960	1710-2700	3300-4000
Gain	9 DBI			
VSWR	≤ 1.8	≤ 1.5	≤ 1.5	≤ 1.5
Front to Back Ratio(dB)	≥ 15	≥ 15	≥ 15	≥ 15
Vertical Beamwidth	105°	95°	78°	59°
Horizontal Beamwidth	87°	68°	56°	48°
Polarization Type	Vertical			
PIM(IM3)	≤ -107 dBm @ 2 x 33 dBm			
Max Power	50 W			
Input Impedence	50 Ω			

Operating Temperature	-40 °C to +65°C
Relative Humidity	5 to 95%
Lightning Protection	DC ground
Rated Wind Velocity	210 km/h

Connector	N-Female
Mount	Pole Mount
Radome Material	ABS
Radome Color	White
Mounting Hardware	Φ 35 - Φ 50 mm
Clamp	U Clamp
Cable	RG 141/ Rg58
Cable length	200 MM
Compliances	CE compliant
ROHS	ROHS Compliant
Brand	Gleam Light India

Features

**Wide Frequency Range Excellent
Electrical Performance
Maintenance Free**

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

GLEAM LIGHT INDIA PRIVATE LIMITED

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041






5G LPDA Antenna






An ISO 9001: 2015 Certified Company



Radiation

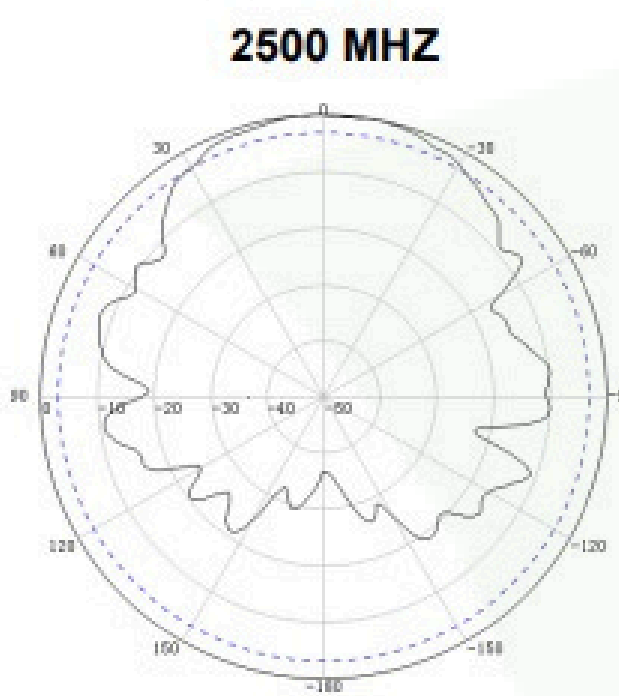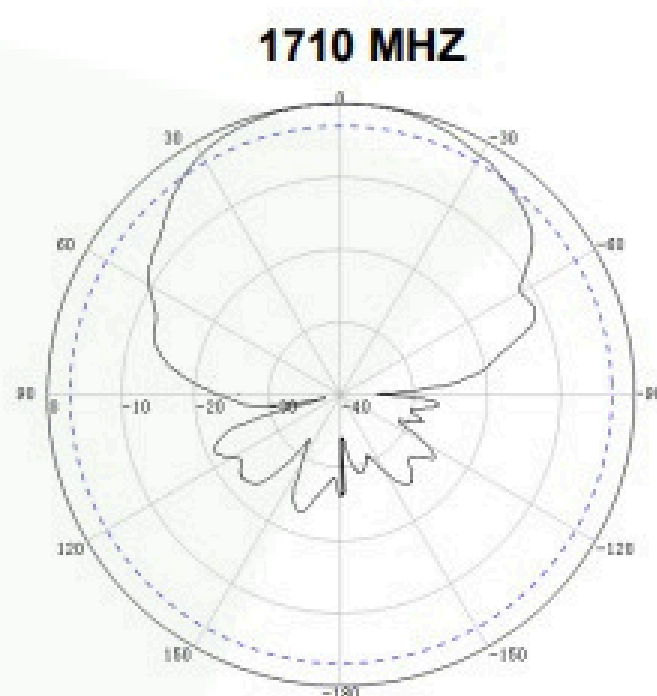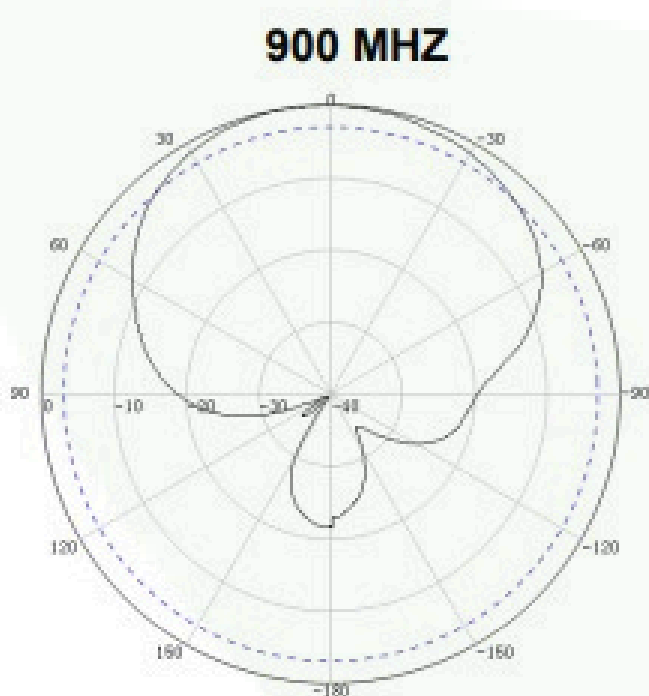

Horizontal

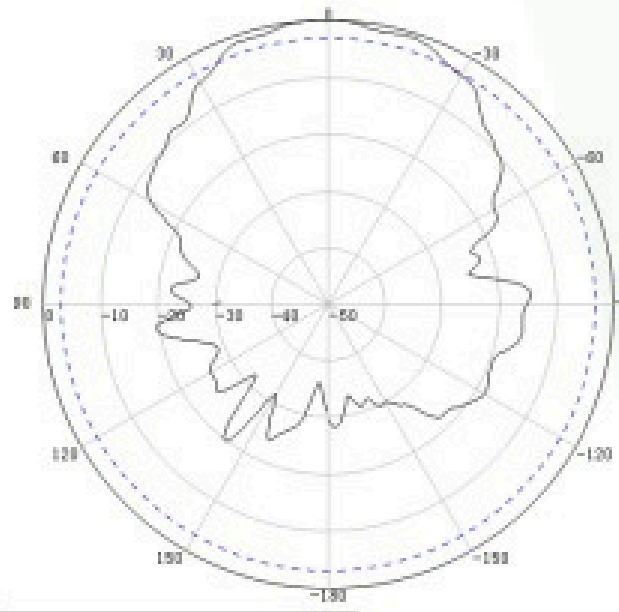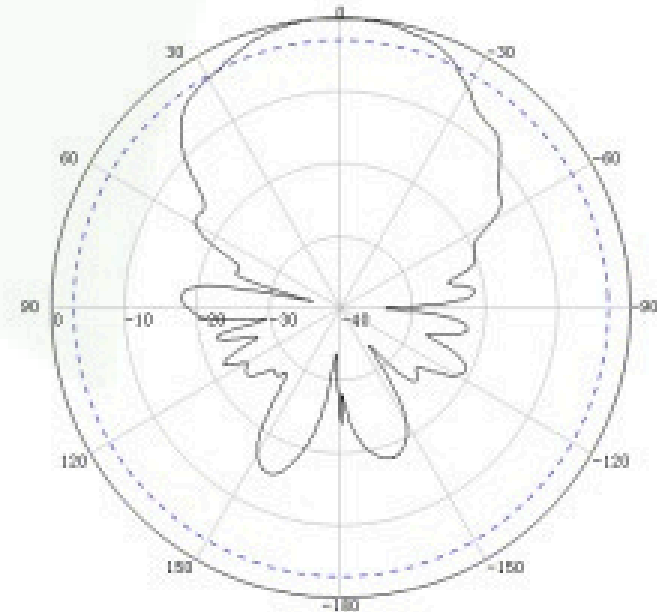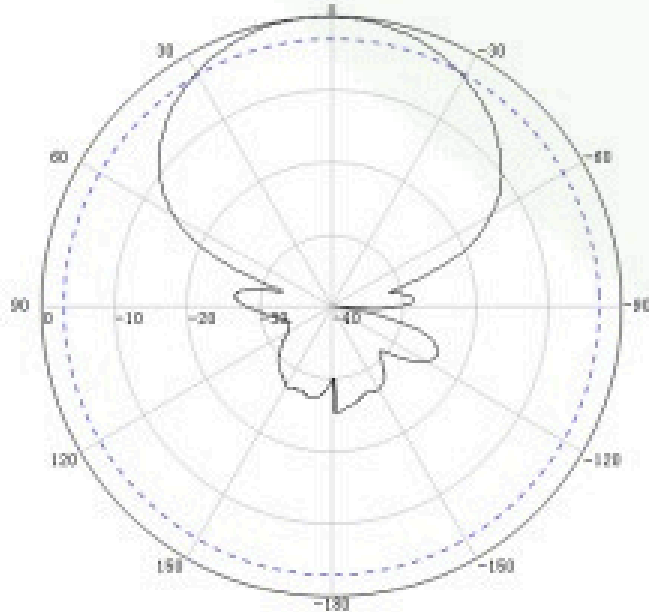

Vertical

CALL OR +91-8800386366

Follow Us For More Updates [GLEAMLIGHTINDIA](#) /

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

GLEAM LIGHT INDIA PRIVATE LIMITED

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

