

# 5G Patch Panel Antenna 12 dBi



An ISO 9001:2015 Certified Company

## Technical Specifications


Model No.	PPAFBS5G12
Frequency Range	698-960MHz / 1710MHz - 2170 MHz / 2300-2700MHz / 3400-4000MHz
Gain	10/12 Dbi
VSWR	$\leq 2:1$
Impedance	50 $\Omega$
Horizontal Beam Width	90°
Vertical Beam Width	75°
3rd Order Inter Modulation	$\leq -150$ dBc @ 2X33 dBm
Polarization	Vertical
Maximum Input Power	50 W
Lighting Protection	DC Ground
Operating Temp	-30 ~ +70° C
Storage Temperature Range	-40 ~ +55° C
Relative Humidity	5% - 95%
Radom Material	ABS
Mounting	Wall Mount
Radiator Material	Copper /Brass/Aluminum
Color	White
Pig Tail Type	RF Coaxial Cable RG141 / RG 402 / RG58
Cable Length	Approx. 300 mm
Input Connector Type	N Female
Connector Contact	Copper with flash white bronze over silver coating
Connector Pin	White bronze over silver coating
Compliances	CE Compliant
ROHS	ROHS compliant
Brand	Gleam light India



## FEATURES

- 2G/3G/4G/5G wireless services
- Low return loss, Stable performance
- Wall Mounting Installation
- Ultra-wideband

## Radiation Pattern

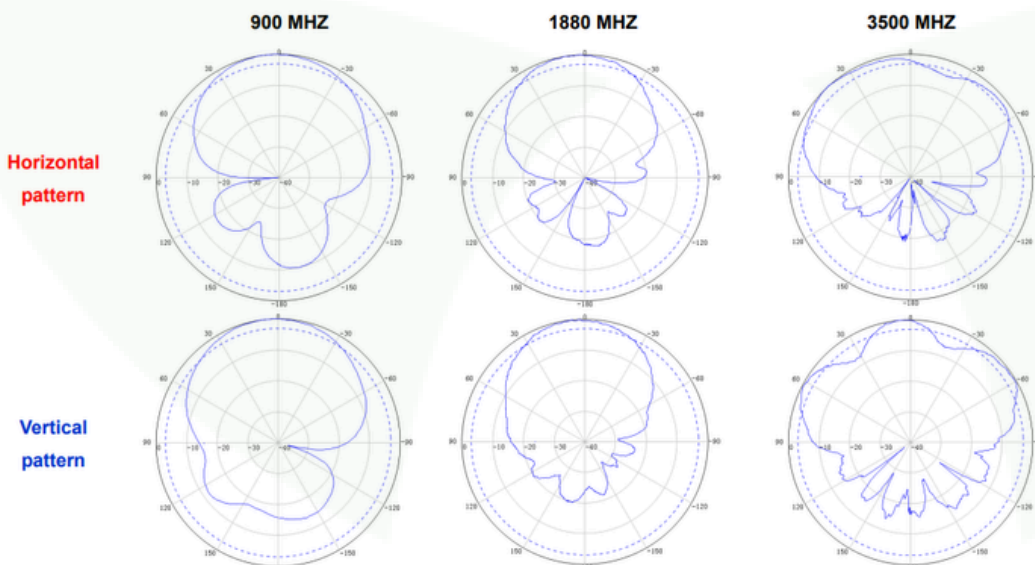

CALL OR  +91-8800386366

Follow Us For More Updates     

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

GLEAM LIGHT INDIA PRIVATE LIMITED

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

