




# 5G Patch Panel Antenna



An ISO 9001: 2015 Certified Company

## Technical Specifications:

Model No.	PPAABS5G80
Frequency Range	698-4000 MHz
Polarization	Vertical
Gain	8 Dbi
VSWR	≤ 2.0
Lightning Protection	DC ground
Operating Temperature	-40 °C ~ +65 °C
Horizontal Lobe width	55°
Vertical Lobe width	35°
Maximum Input Power	50W
Input Impedence	50Ω
Connector Type	N Female / Customized
Weight	400Gms
Passive Intermod (IM3)	<-150dBc@(2x20W)
Max Power Handling	50W
Cable	Rg58 cable
Cable Length	300mm/Customized
Radome Material	ABS
Radiator Material	PCB/Aluminum
Radome Color	White
Mounting Type	Wall/Pole Mountable
Compliances	CE compliant
ROHS	ROHS Compliant
Brand	Gleam Light India

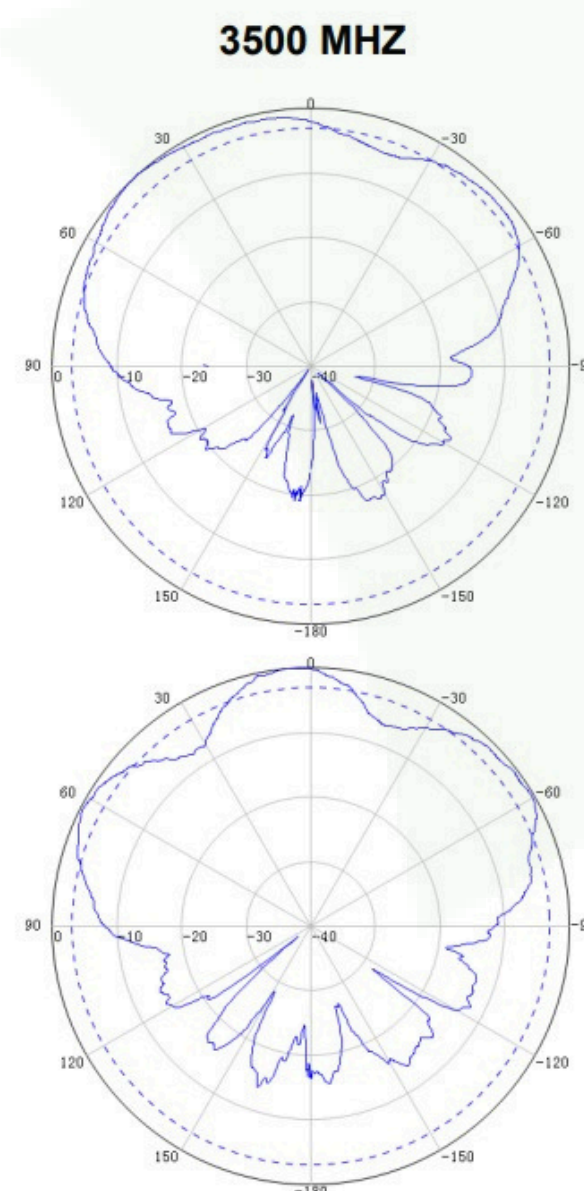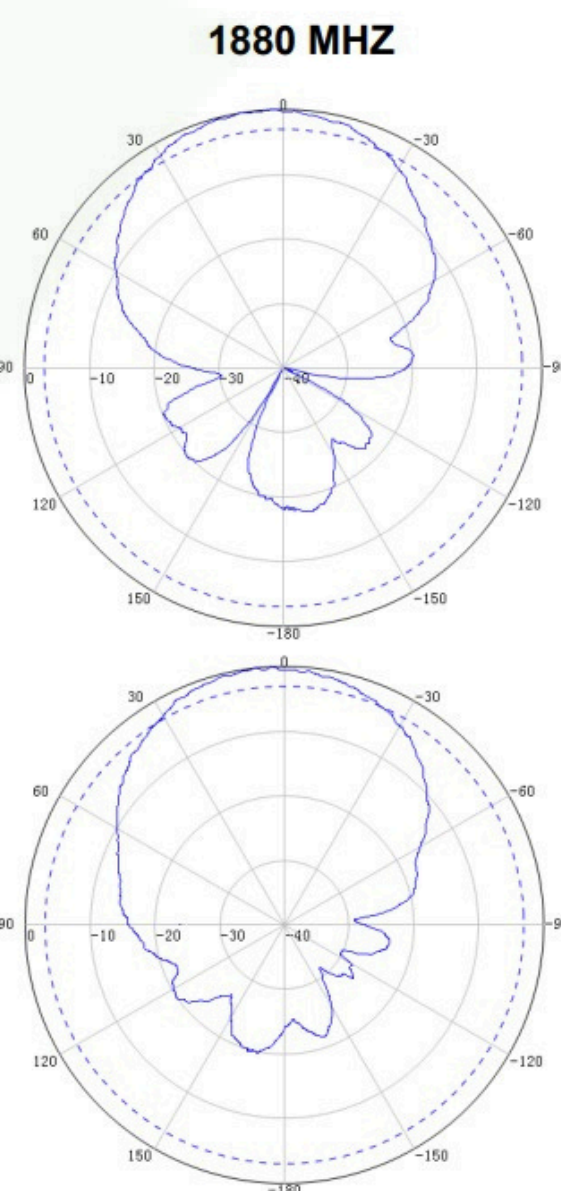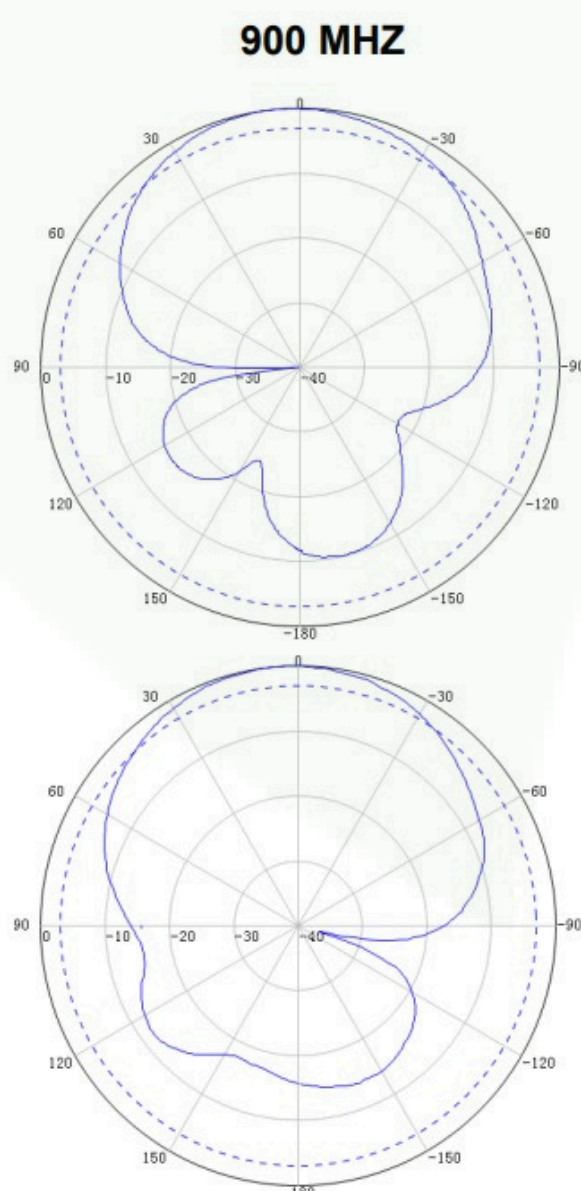

CALL OR  +91-8800386366

Follow Us For More Updates [GLEAMLIGHTINDIA](#) /     

[Info@gleamlightindia.com](mailto:Info@gleamlightindia.com) / [www.gleamlightindia.in](http://www.gleamlightindia.in) / [www.gleamlightindia.com](http://www.gleamlightindia.com) / [www.gleamindia.com](http://www.gleamindia.com)

GLEAM LIGHT INDIA PRIVATE LIMITED

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

