

GSM RUBBER DUCK ANTENNA



An ISO 9001: 2015 Certified Company



Technical Specifications:

Model No.

GSMIDSMA02

Frequency Range

824~894/1710~2170MHz

Polarization

Linear

Gain

0-2 (Zenith) dBi

VSWR

≤ 2.5

Maximum Input Power

50 w

Impedance

50 W

Connector Type

SMA M / RP SMA M

Operating Temp.

-40-80

Radome Material

ABS/PP

Radom Color

Black

Brand

Gleam Light India

ROHS

Compliant

Compliances

CE compliant



CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA /**     
Info@gleamlightindia.com /www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

GSM RUBBER DUCK ANTENNA




Gain 2 DBI

824-2170 MHZ

Rubber Protector, Waterproof and
Prevent from Oxidization

High-quality interface

Quality Screw interface, makes the
connection closer and signal more stable

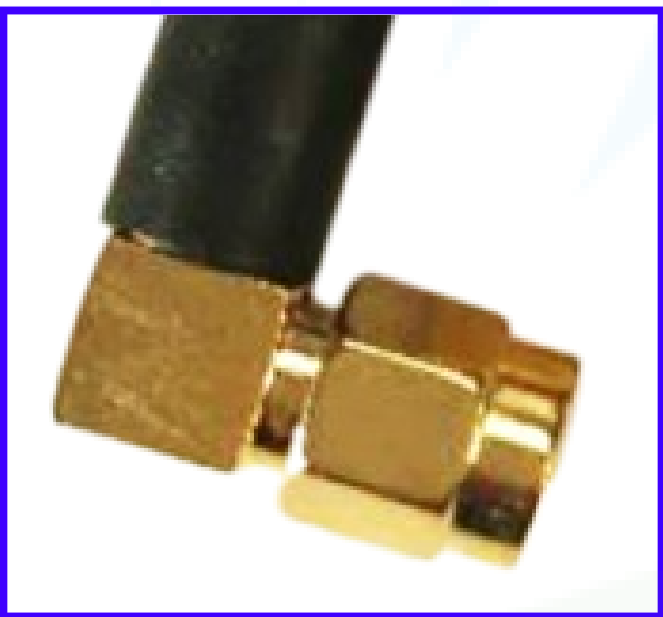

Right Angle
90°



Straight
180°



SMA M

**Connector
Type**



RP SMA M



CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     
Info@gleamlightindia.com / www.gleamlightindia.in / www.gleamindia.com
12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041