

# GSM Rubber Duck Antenna



## Technical Specifications:

Model No.	GSMIDSMA02
Frequency Range	824~894/1710~2170MHz
Polarization	Linear
Gain	0-2 (Zenith) dBi
VSWR	≤2.5
Maximum Input Power	50 w
Impedance	50 Ω
Connector Type	SMA M/RP SMA M
Operating Temp.	-40~+80°C
Radome Material	ABS/PP
Radom Color	Black
Brand	Gleam Light India
ROHS	Compliant
Compliances	CE compliant

**CALL OR** **+91-8800386366**

Follow Us For More Updates [GLEAMLIGHTINDIA](#) /

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

**GLEAM LIGHT INDIA PRIVATE LIMITED**

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041



# GSM Rubber Duck Antenna




**Gain 2 DBI**

**824-2170 MHZ**

Rubber Protector, Waterproof and Prevent from Oxidization

**High-quality interface**

Quality Screw interface, makes the connection closer and signal more stable

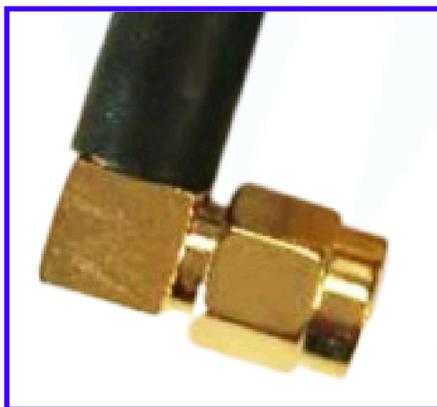

**Right Angle**  
90°



**Straight**  
180°



Connector Type



**SMA M**

**RP SMA M**

**CALL OR** **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

**GLEAM LIGHT INDIA PRIVATE LIMITED**

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

