

GSM RUBBER DUCK ANTENNA



An ISO 9001: 2015 Certified Company



Technical Specifications:

Model No	GSMIDSMA03
Frequency Range	824~894/1710~2170MHz
Polarization	Linear
Gain	3 dBi (Zenith)
VSWR	≤ 2.5
Maximum Input Power	80 W
Impedance	50 Ω
Connector Type	SMA M / RP SMA M
Operating Temp	--40° to 80°C
Radome Material	ABS/PP
Radom Color	Black
ROHS	Compliant
Brand	Gleam Light India
Compliances	CE compliant




CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA /**     
Info@gleamlightindia.com /www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

GSM RUBBER DUCK ANTENNA

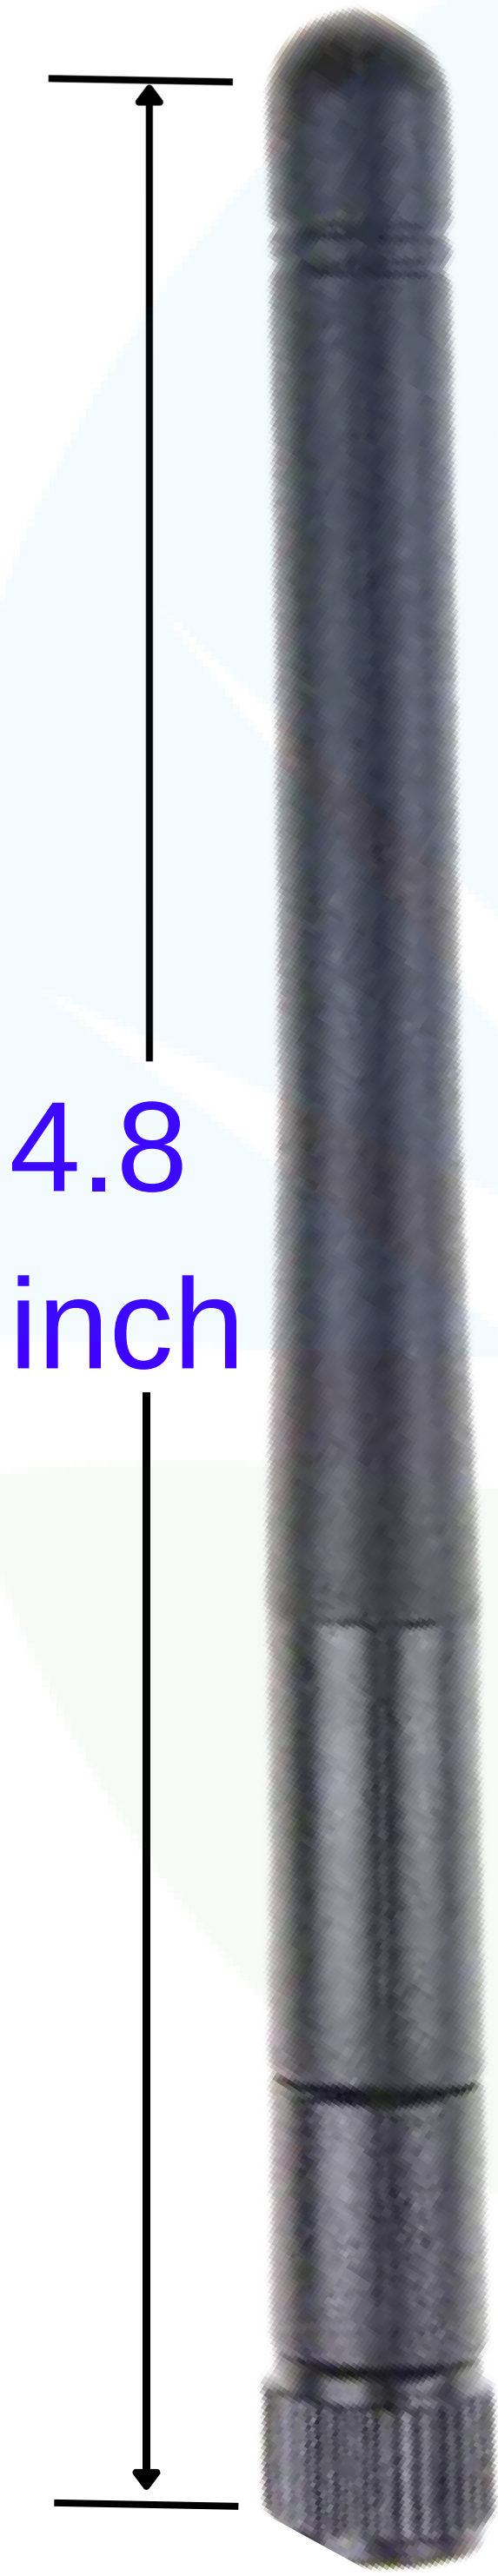

4.8
inch



Gain 3 DBI
824-2170 MHZ

Rubber Protector, Waterproof and
Prevent from Oxidization



High-quality interface
Quality Screw interface, makes the
connection closer and signal more stable



Wide Angle
90°-180°

CONNECTOR TYPE



SMA M



RP SMA M



CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     
Info@gleamlightindia.com / www.gleamlightindia.in / www.gleamlightindia.com / www.gleamindia.com
12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041