

# GSM Rubber Duck Antenna



An ISO 9001: 2015 Certified Company



## Technical Specifications:

Model No	GSMIDSMA03
Frequency Range	824~894/1710~2170MHz
Polarization	Linear
Gain	3 dBi (Zenith)
VSWR	≤2.5
Maximum Input Power	20 W
Impedance	50 Ω
Connector Type	SMA M / RP SMA M
Operating Temp	-40~+80°C
Radome Material	ABS/PP
Radom Color	Black
ROHS	Compliant
Brand	Gleam Light India
Compliances	CE compliant

**CALL OR**  **+91-8800386366**

Follow Us For More Updates [GLEAMLIGHTINDIA](#) /     

[Info@gleamlightindia.com](mailto:Info@gleamlightindia.com) / [www.gleamlightindia.in](http://www.gleamlightindia.in) / [www.gleamlightindia.com](http://www.gleamlightindia.com) / [www.gleamindia.com](http://www.gleamindia.com)

**GLEAM LIGHT INDIA PRIVATE LIMITED**


12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041



# GSM Rubber Duck Antenna



An ISO 9001: 2015 Certified Company

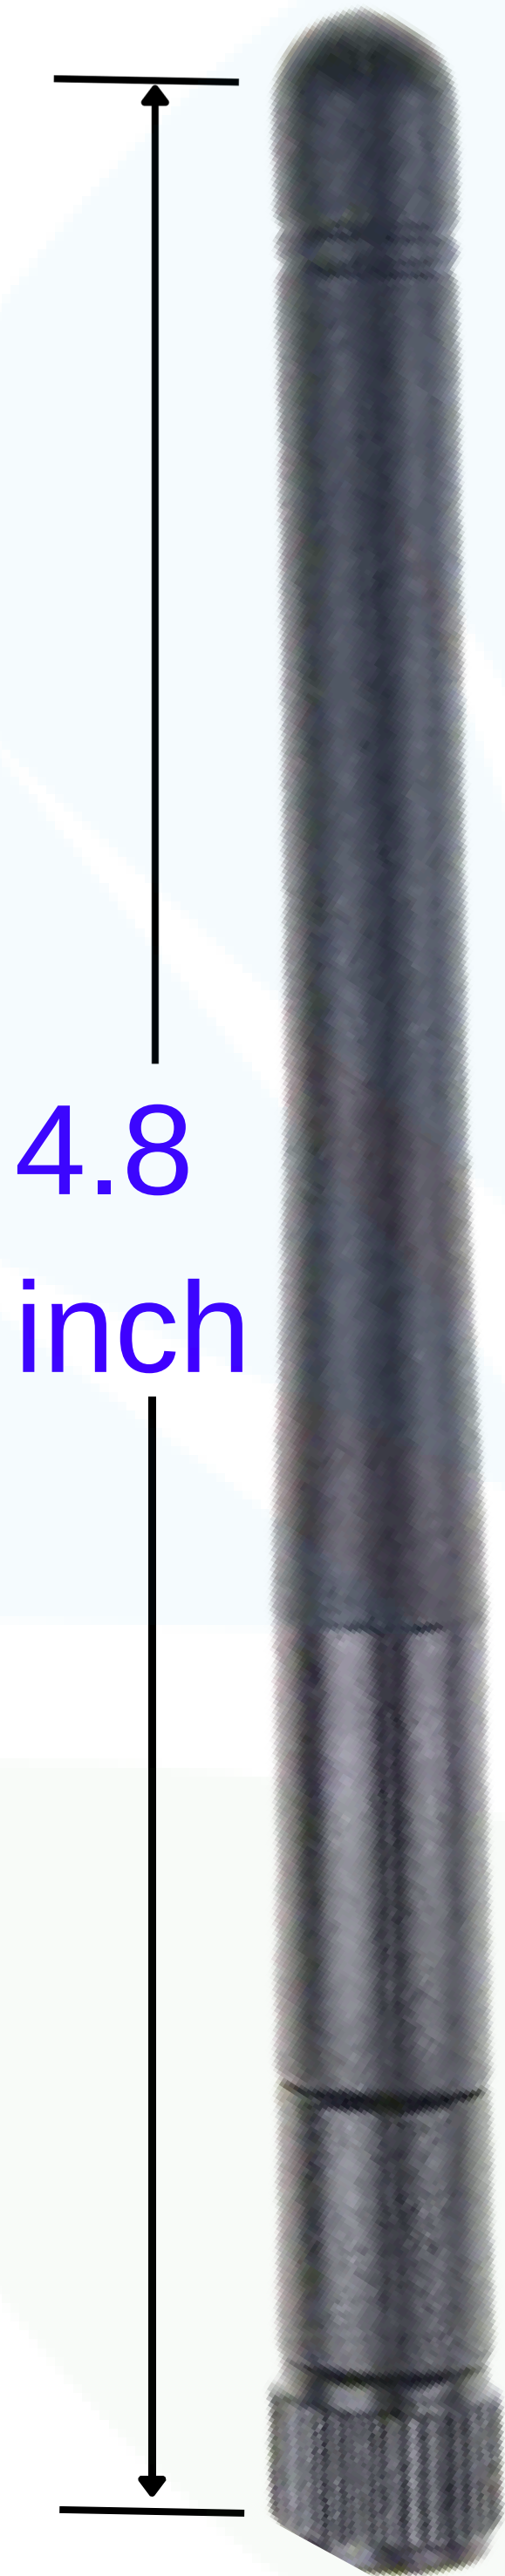

4.8  
inch



## Gain 3 DBI

824-2170 MHZ

Rubber Protector, Waterproof and Prevent from Oxidization



### High-quality interface

Quality Screw interface, makes the connection closer and signal more stable



### Wide Angle

90°-180°

## CONNECTOR TYPE



### SMA M



### RP SMA M

**CALL OR**  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

**GLEAM LIGHT INDIA PRIVATE LIMITED**

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

