

LPDA ANTENNA 9 DBI



An ISO 9001: 2015 Certified Company



Technical Specifications:

Model No -	LPDAOD0009
Frequency Range (MHz)	698-960/1710-2700
Beam Width	60±5
Polarization	Vert. 60°, Horiz. 90°
Gain	9 DBi
Lightning Protection	Direct Ground
VSWR	<1.5
Maximum Input Power (W)	100
Impedance(ohm)	50
Connector Type	NF /Customized
Operating Temp	-40 to 55 C
Mount	Pole Mount
Cable Length	200 MM
Cable	RG58
Redome Colour	White
Clamp	U Clamp
ROSH	Compliant



CALL OR  **+91-8800386366**


Follow Us For More Updates **GLEAMLIGHTINDIA** /     
Info@gleamlightindia.com www.gleamlightindia.in/www.gleamlightindia.com/www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

LPDA ANTENNA 9 DBI



An ISO 9001: 2015 Certified Company

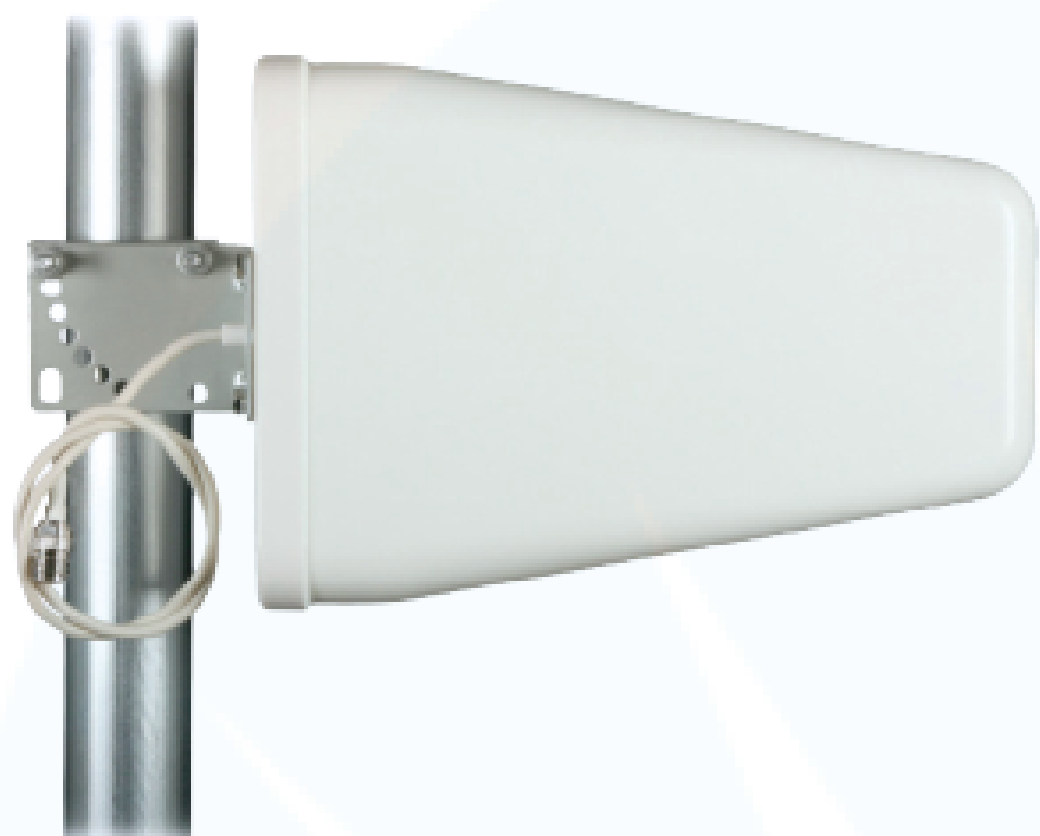

**Mounting
Clamp**



[Click Here](#)



[Installation Guidance](#)




**SMA F
CONNECTOR**




Product Features

- Affordable Price
- weather proof
- Low Insertion
- Loss Low VSWR
- Easily Installed
- Light Weight
- Wide Frequency Band
- Directional Antenna

Radiation

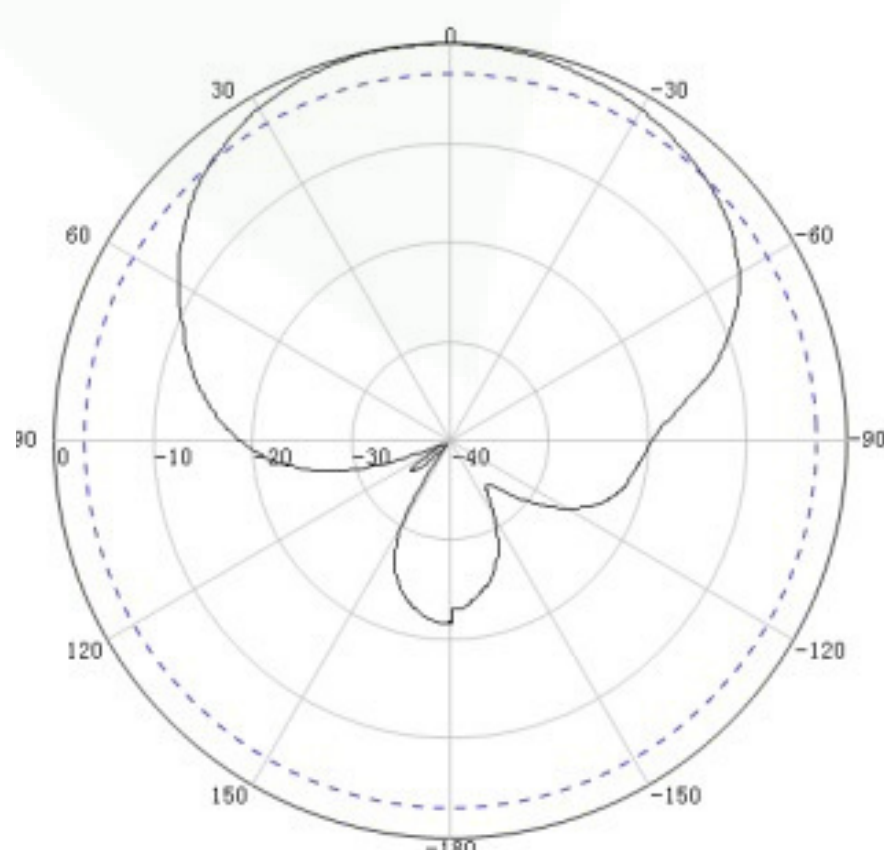

Horizontal Pattern

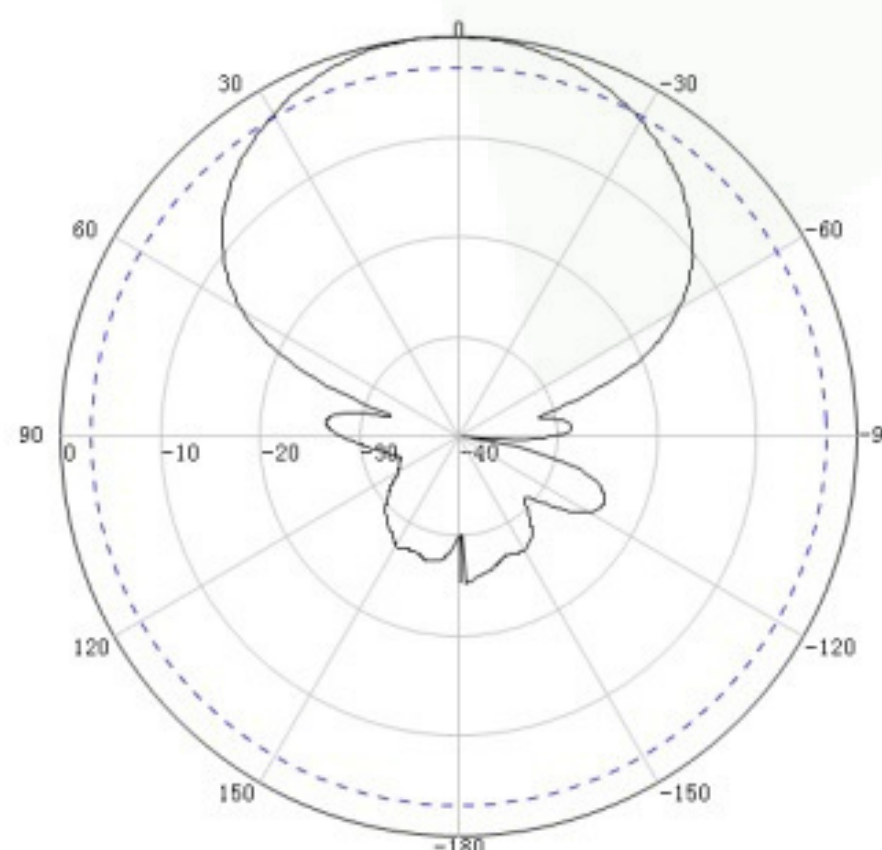

Vertical Pattern



CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     
Info@gleamlightindia.com www.gleamlightindia.in/www.gleamlightindia.com/www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041