



Marine Omni Directional Antenna



An ISO 9001: 2015 Certified Company

Technical Specifications:

Model No-	ODVHFMR912
Frequency Range -	950-1250 MHz
VSWR -	≤ 1.6
Gain-	2-15 Dbi
Horizontal Lobe width	360°
Vertical Lobe Width	55° $\pm$ 10
Lightning Protection-	DC Ground
Operating Temperature-	-40°~+85
Maximum Input Power-	100W
Polarization-	Vertical
Impedance-	50 Ω
Connector-	NF/NM/Customized
Radome material-	Fiberglass
Length -	Customized.
Weight -	Customized.
Compliances	CE Compliant
ROHS	ROHS compliant
Radome colour-	White/Gray/Black
Mounting Method-	Pole Mount
Max Wind Velocity	100 Km/H

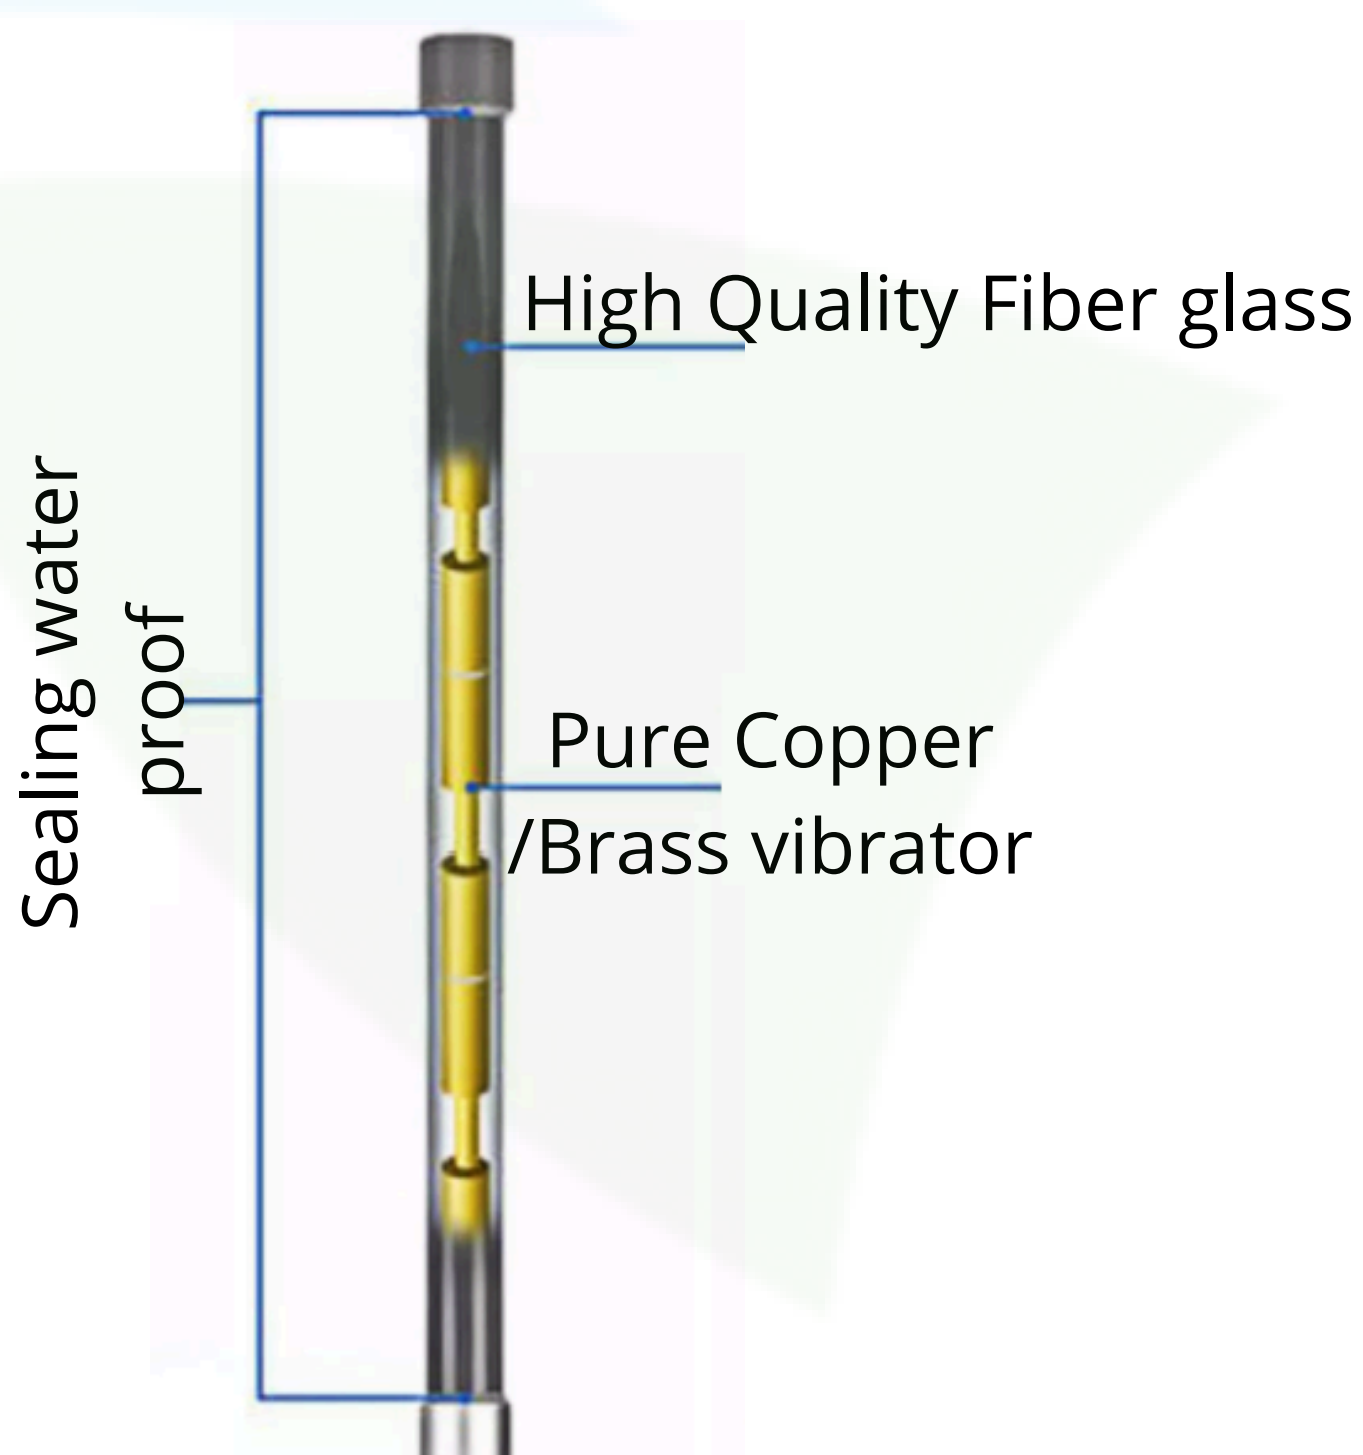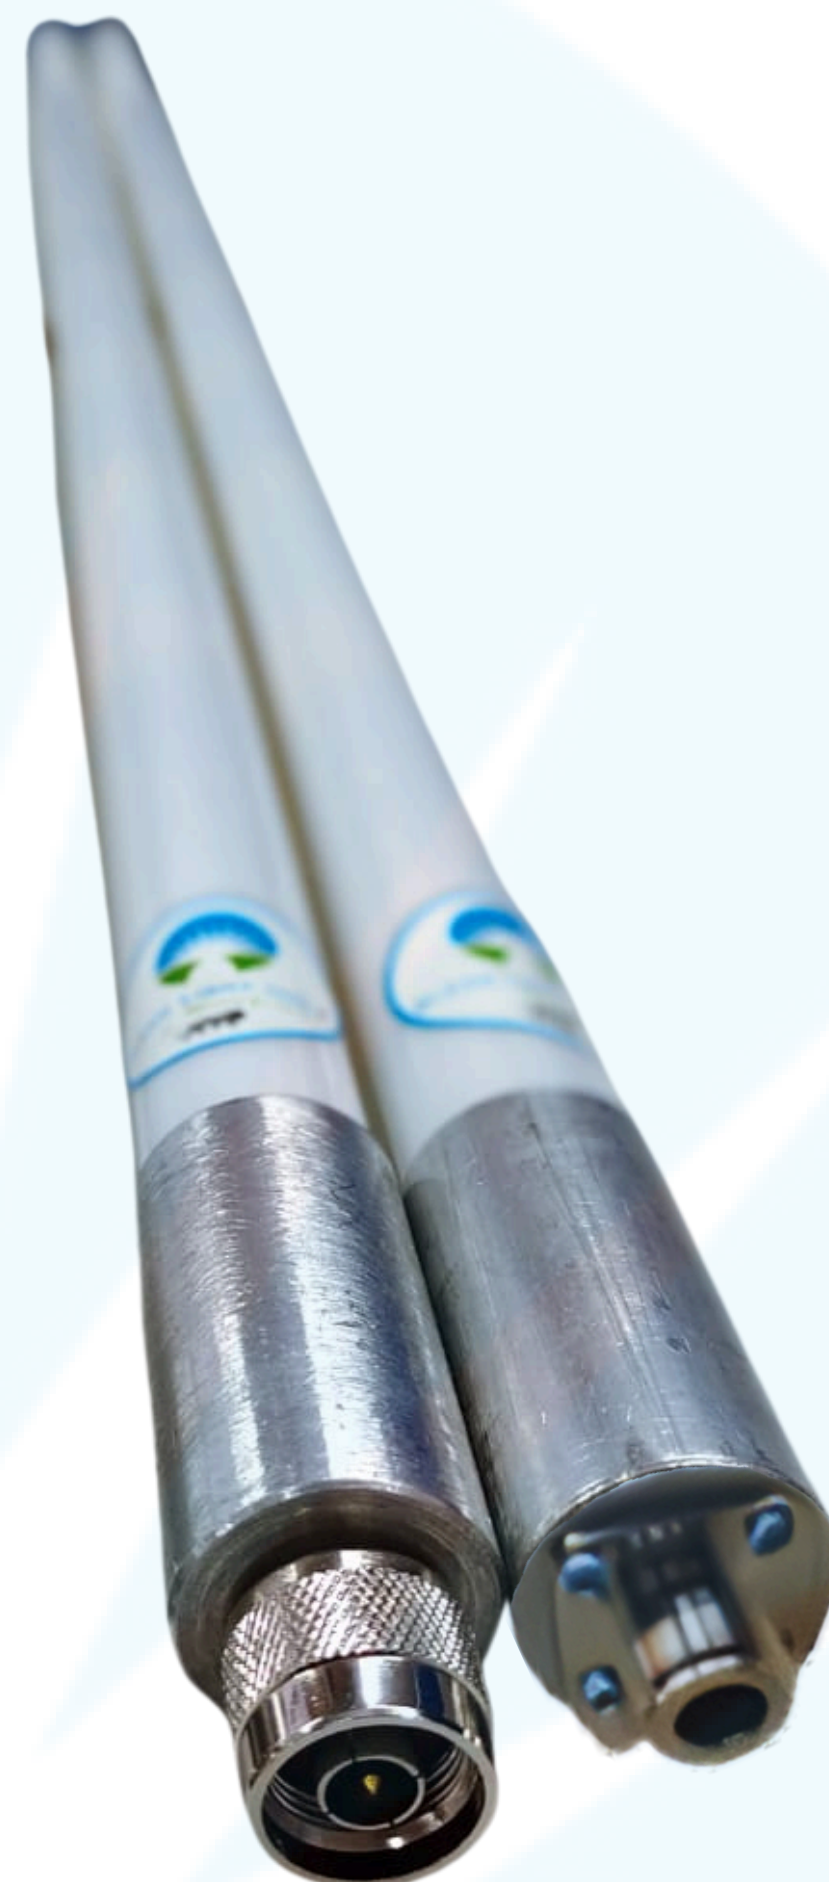

Product Features

- Long Range Coverage
- Light Weight
- Long Durable
- 360° Coverage
- for Marine Application



CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

GLEAM LIGHT INDIA PRIVATE LIMITED

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041