

MIMO VHF/UHF OMNI Directional Antenna



An ISO 9001: 2015 Certified Company

Technical Specifications

Model	MIODUVUHF5
Frequency Range	174-698Mhz
Polarization	Vertical
Gain	5.5 Dbi
Input Impedance	50Ω
Horizontal Lobe width	360°
Vertical Lobe width	55°
Lightning Protection	DC Ground
Standing Wave Ratio	≤2.0
Power Handling	100 W
Connector	N Male / Customize
Outer Cover Material	Fiberglass
Color	Black
Operating Temperature	-20~+60°C
Compliances	CE compliant
ROHS	ROHS Compliant



Features

- Vertical Polarization
- 360° Working
- Cellular network boosters
- Made from materials like fiberglass or ABS plastic
- Pole mount options available



N Type Connector

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

GLEAM LIGHT INDIA PRIVATE LIMITED


12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041



MIMO VHF/UHF OMNI Directional Antenna



An ISO 9001: 2015 Certified Company

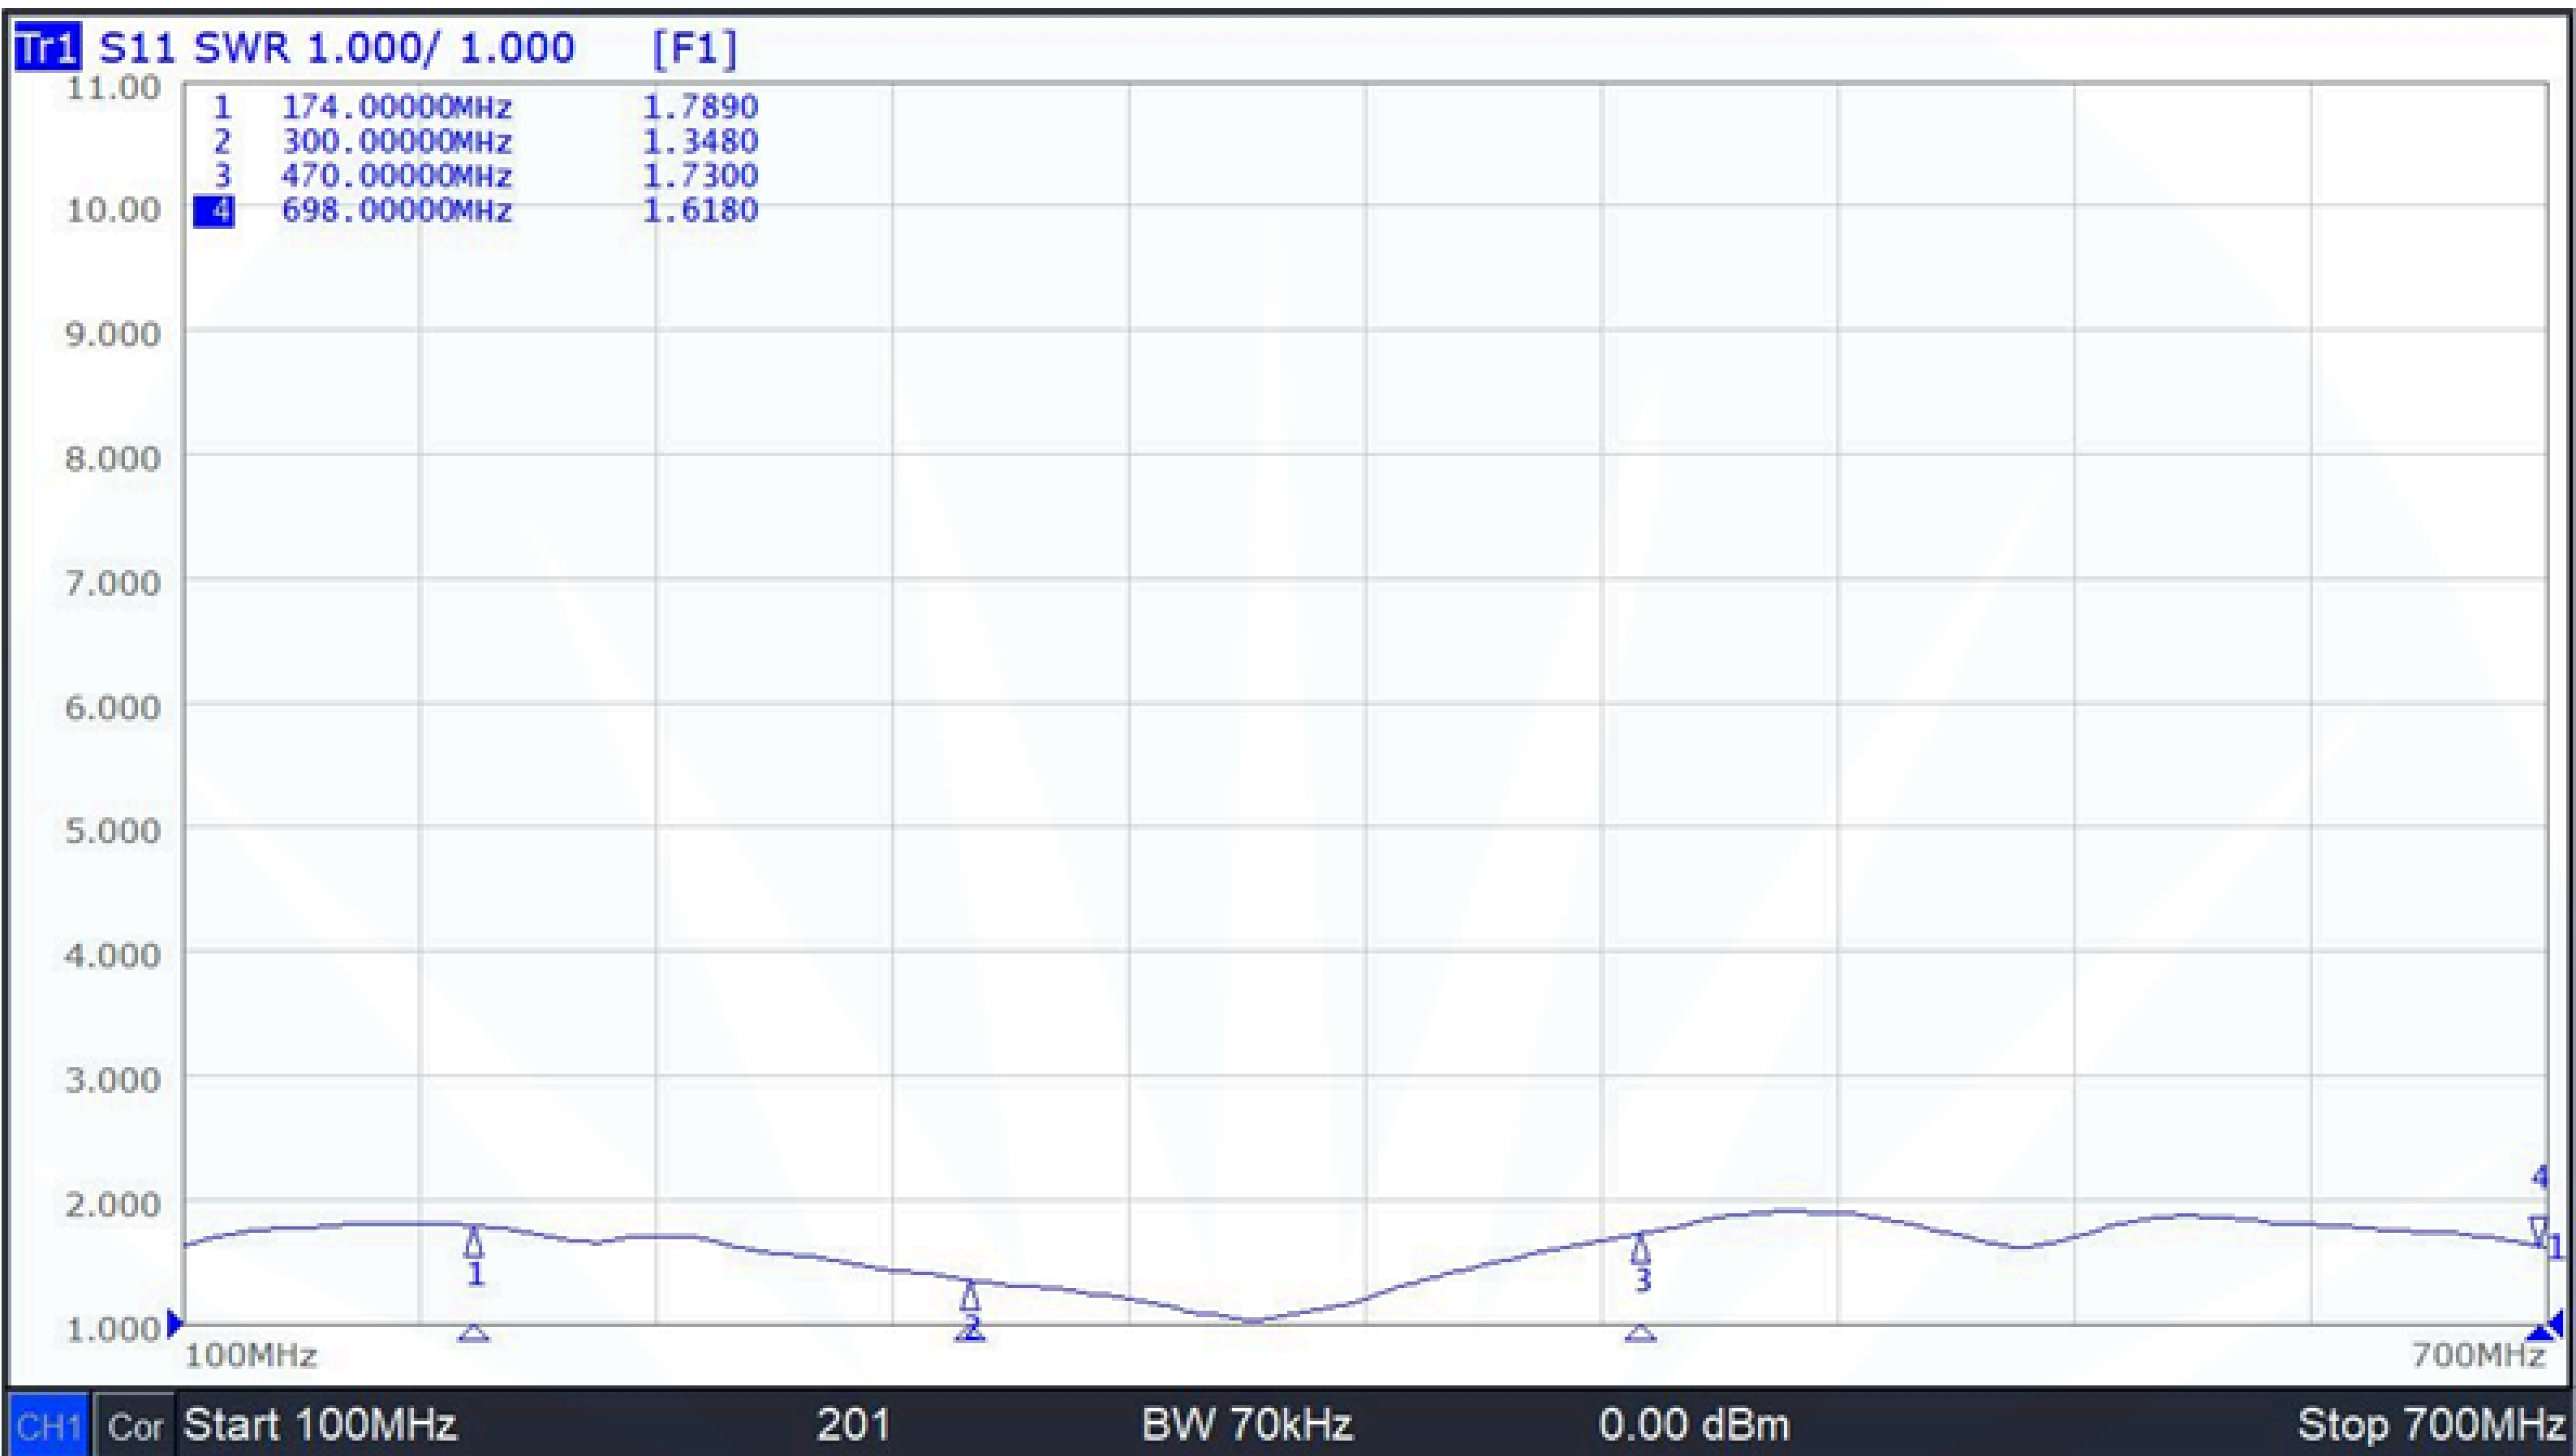

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /     

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com

GLEAM LIGHT INDIA PRIVATE LIMITED

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

