


RG 142 CABLE



An ISO 9001: 2015 Certified Company

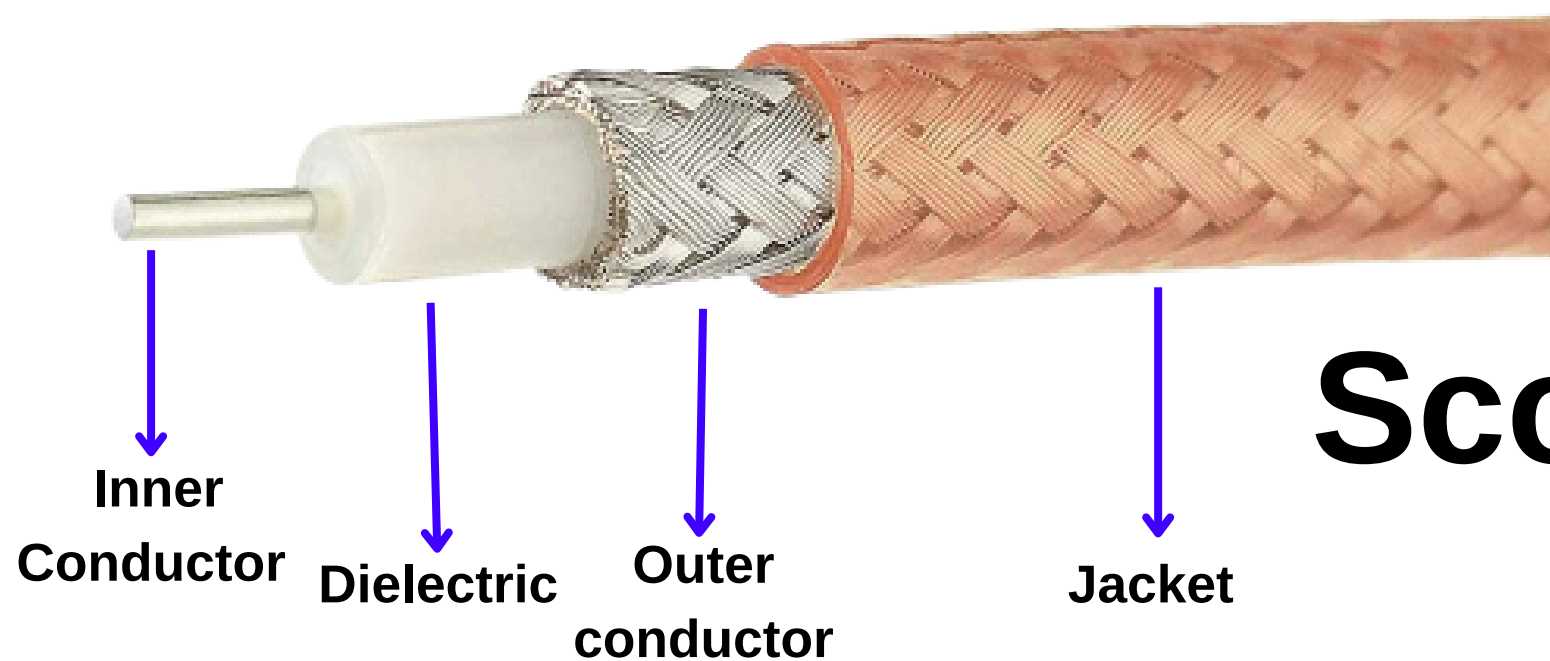

Scope

Technical Specifications:

Characteristics

Properties

Cutoff frequency

Characteristics impedance

Capacitance

Min. bending radius

Nominal weight

Temp rang

Brand

ROHS

Details

12.4 Ghz

50±2.5Ω

96.50Pf/m

44.0mm

2kg/100m

-55° to 65°c

GLI RG142 Cable / OCT RG142 Cable

Compliance



Attenuation

Frequency

Attenuation (db/100m, 5-10% increment allowance

Power (watt)

1000 MHz

43.0

240

4000MHz

97.9

205

6000MHz

113.0

180

1250MHz

145.5

100

Composition

Items

Material

Diameter(mm)

Center conductor

silver plated copper cover

0.94

Dielectric

Solid PTFE

2.95

1 out shield

silver plated copper wire braiding

3.60

2 out shield

silver plated copper wire braiding

4.191

Jacket

FEP (BROWN)

4.95

CALL OR  **+91-8800386366**

Follow Us For More Updates **GLEAMLIGHTINDIA** /



Info@gleamlightindia.com www.gleamlightindia.in/www.gleamlightindia.com/www.gleamindia.com

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

