

5G MIMO PATCH PANEL ANTENNA



Features

- Wide Frequency Range
- Excellent Electrical Performance
- Maintenance Free



Technical Specifications:

Model No -	MIMO05G012				
Gain	12 DBI				
Frequency Range (MHz)	698-806	806-960	1710-2170	2200-2700	3300-3800
Vertical Beamwidth	73°	70°	60°	45°	30°
Horizontal Beamwidth	80°	80°	65°	60°	55°
VSWR	≤1.8				
Polarization Type	Linear H / V for each Radiator				
PIM(IM3)	≤-107 dBm @ 2 x 33 dBm				
Max Power Input	50W				
Impendence	50Ω				

Operating Temperature	-40 °C to +65 °C
Relative Humidity	5 to 95% L
Lightning Protection	DC ground

Connector	N-Female
Radome Material	ABS
Radome Color	White
Mounting Type	Wall Mounting
Cable	Rg58/ RG14
Cable Length	200 Mm



CALL OR +91-8800386366

Follow Us For More Updates

Info@gleamlightindia.com/www.gleamlightindia.in/gleamlightindia.com/www.gleamindia.com


GLEAM LIGHT INDIA PRIVATE LIMITED

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041

5G MIMO PATCH PANEL ANTENNA




An ISO 9001: 2015 Certified Company

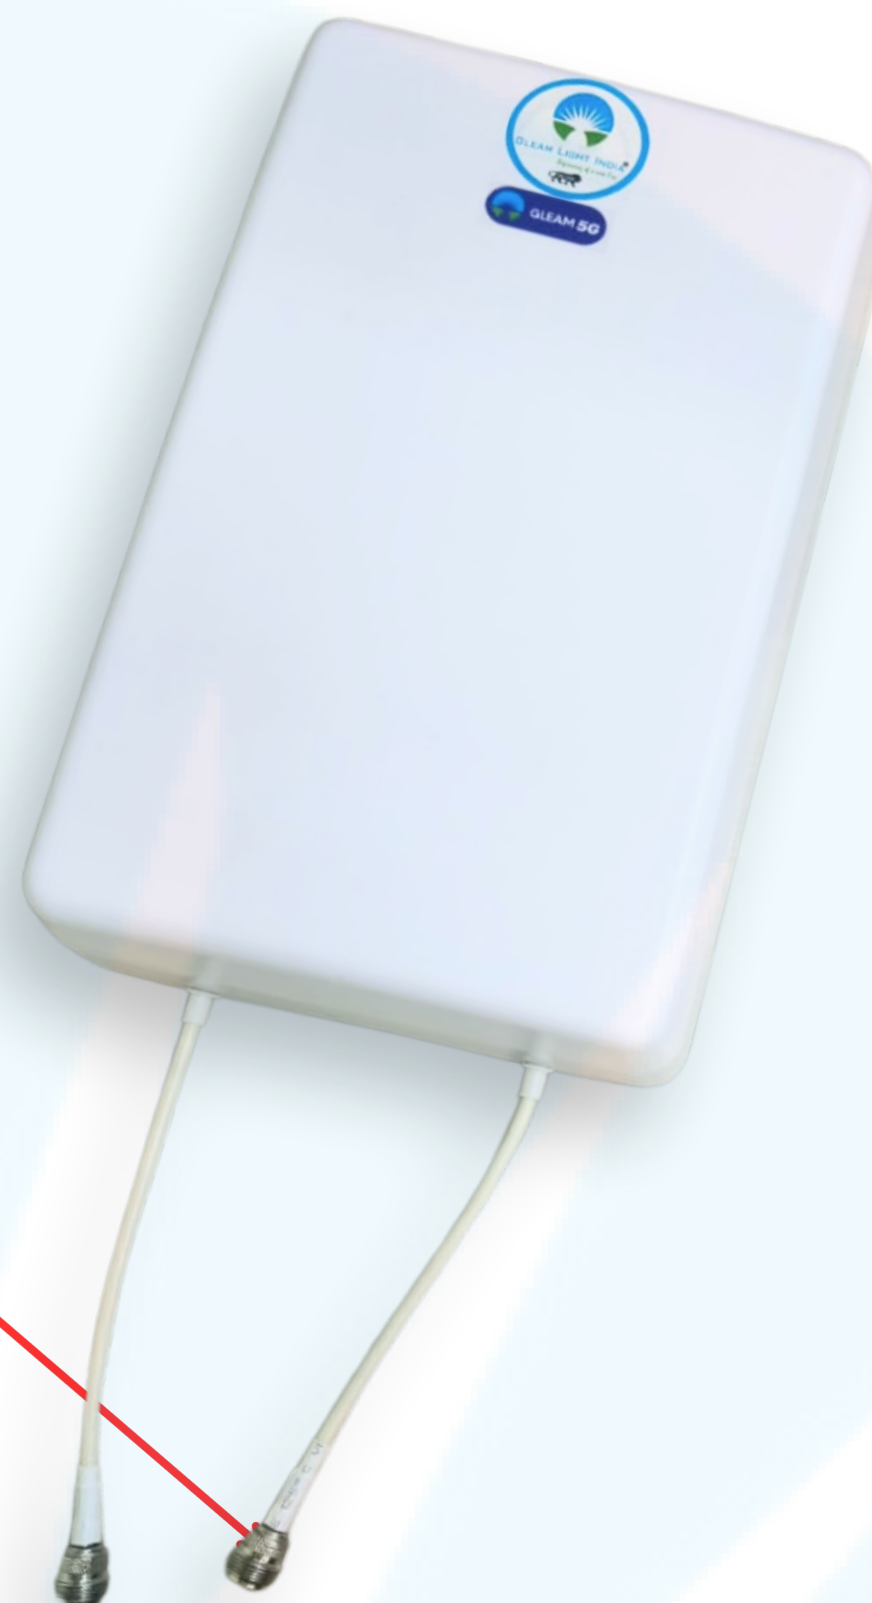


Radiation


900 MHZ

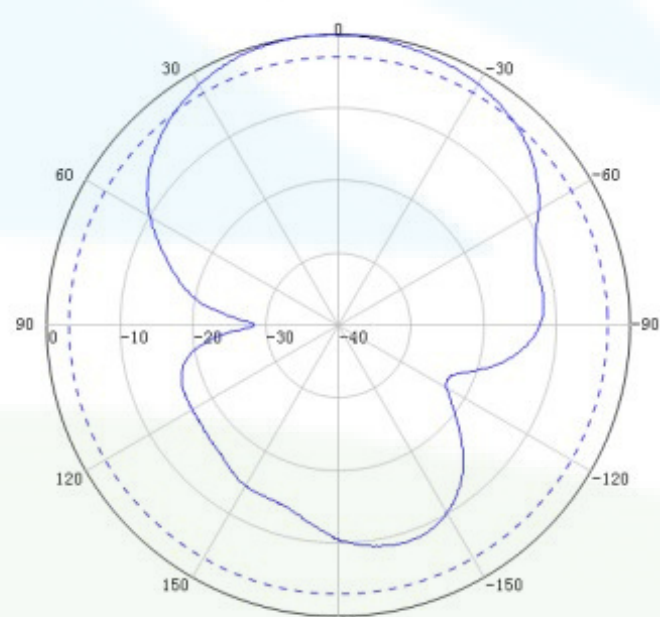




1710 MHZ

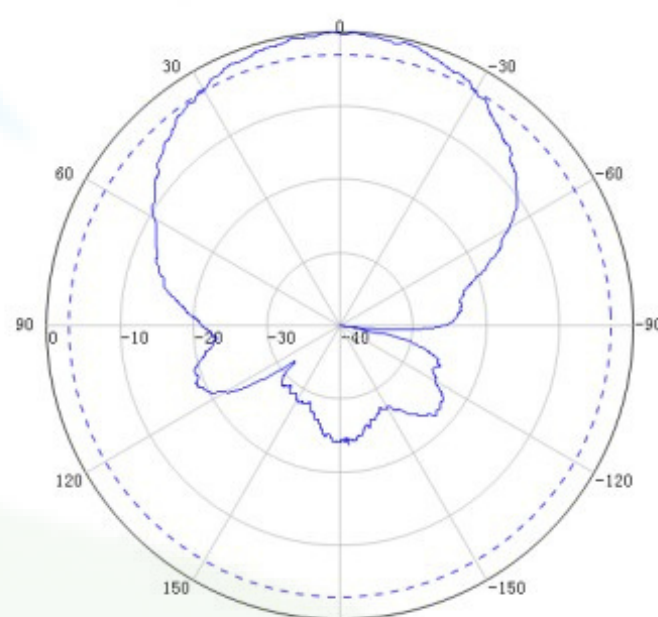

3500 MHZ

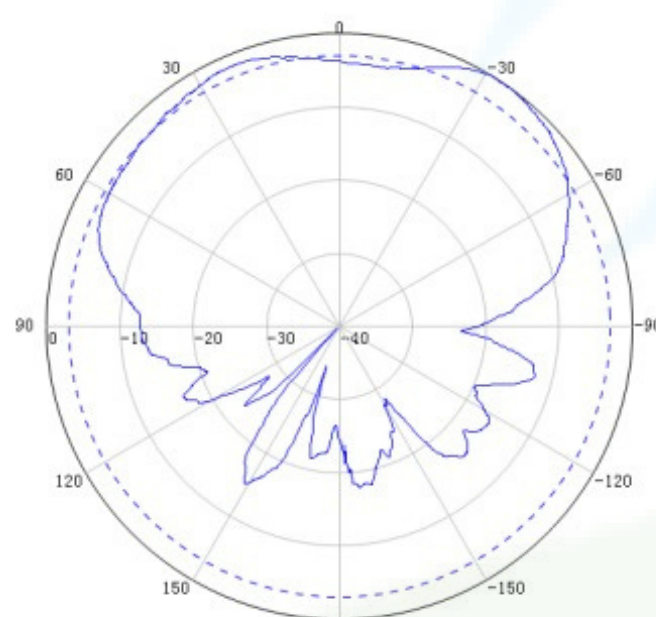

Horizontal

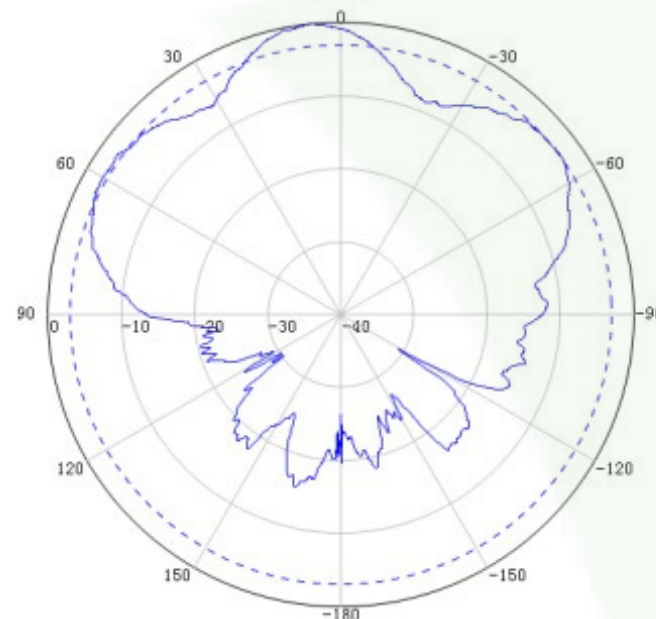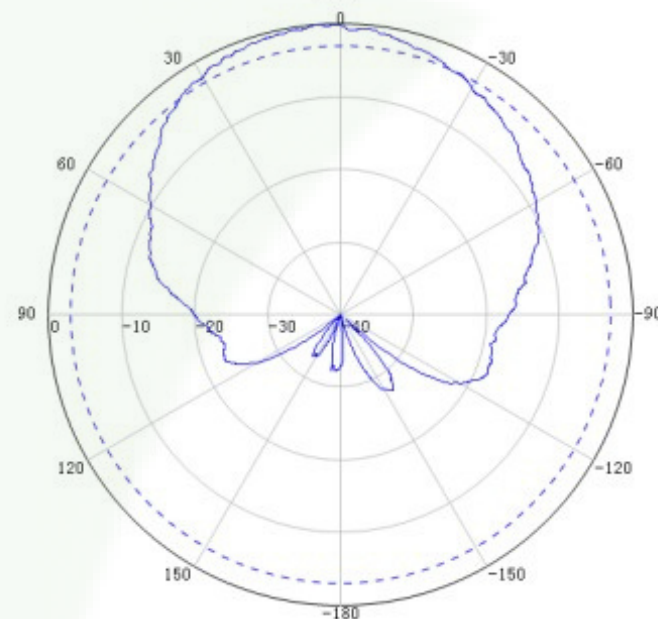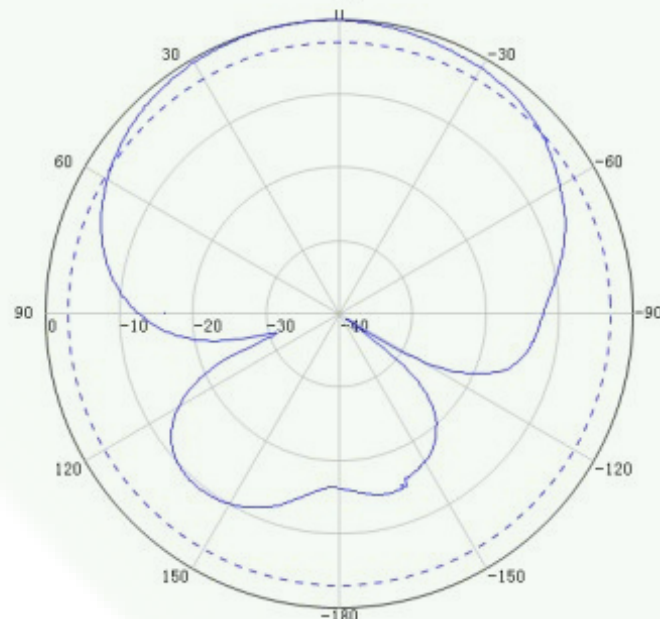

Vertical



CALL OR +91-8800386366

Follow Us For More Updates [GLEAMLIGHTINDIA](#) /

Info@gleamlightindia.com / www.gleamlightindia.in / www.gleamindia.com

GLEAM LIGHT INDIA PRIVATE LIMITED

12B Block -A, Behind Kanishka Garden, Amar Colony Main Rohtak Road Nangloi, New Delhi, Delhi 110041